

Freedom™
Termination at RTU With Counterflashing
FD 503B


Diagram

Updated: 11/06



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

RS MAX 10 YR WARRANTY

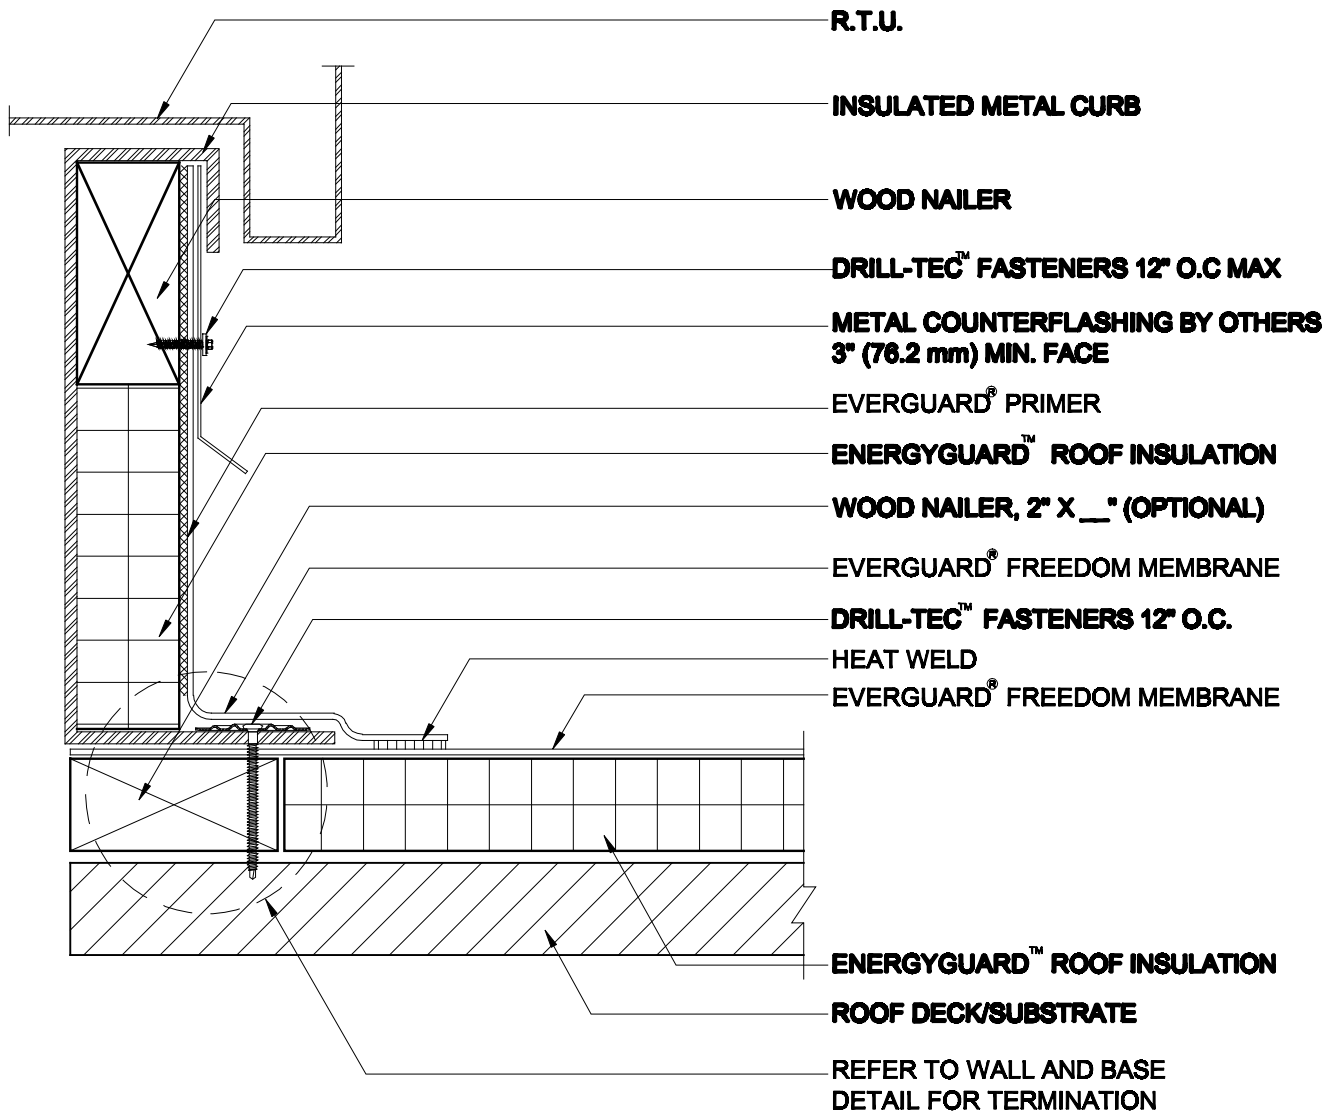

NOTE:

1. METAL COUNTERFLASHING IS NOT REQ. IF MEMBRANE IS RUN UP AND OVER CURB WALLS PRIOR TO INSTALLATION OF R.T.U.
2. WHEN REINFORCEMENT OF TPO MEMBRANE IS EXPOSED REFER TO NOTE 5.
3. INSTALL METAL WORK IN ACCORDANCE WITH CURRENT SMACNA RECOMMENDATIONS.
4. TO MAKE A SEAM ON RS WITHOUT RS PRESENT, YOU MUST USE GAF CLEANER AS WELL AS GAF PRIMER TO PREP THE AREA.
5. APPLY EVERGUARD® TPO CUT EDGE SEALANT TO ALL CUT REINFORCED TPO EDGES (REFER TO DETAIL FD 115) AND ALL RS SEAMS.



**TERMINATION AT R.T.U. WITH
COUNTERFLASHING**

FREEDOM RS & HW

**DRAWING #
FD 503B**

SCALE	ISSUE/ REVISION DATE
N.T.S.	11-01-06