


PLAN VIEW

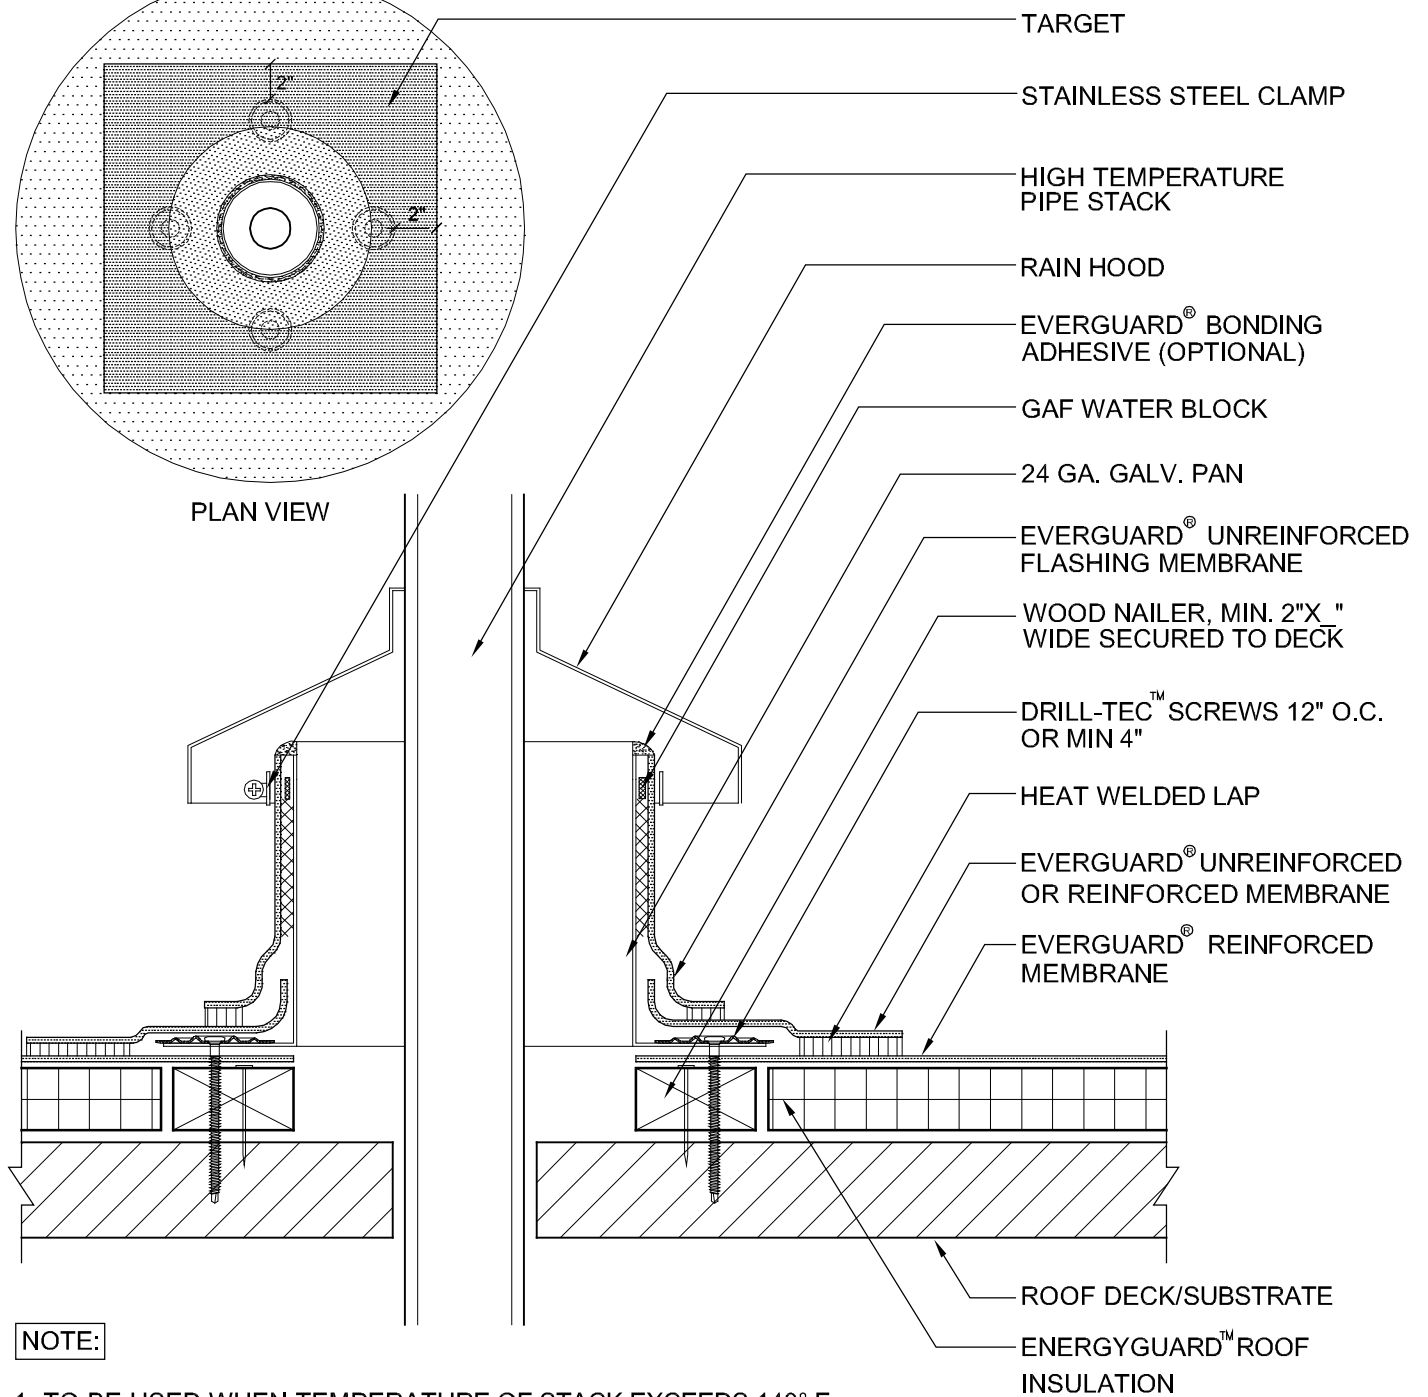

- TARGET
- STAINLESS STEEL CLAMP
- HIGH TEMPERATURE PIPE STACK
- RAIN HOOD
- EVERGUARD® BONDING ADHESIVE (OPTIONAL)
- GAF WATER BLOCK
- 24 GA. GALV. PAN
- EVERGUARD® UNREINFORCED FLASHING MEMBRANE
- WOOD NAILER, MIN. 2"X " WIDE SECURED TO DECK
- DRILL-TEC™ SCREWS 12" O.C. OR MIN 4"
- HEAT WELDED LAP
- EVERGUARD® UNREINFORCED OR REINFORCED MEMBRANE
- EVERGUARD® REINFORCED MEMBRANE
- ROOF DECK/SUBSTRATE
- ENERGYGUARD™ ROOF INSULATION

**NOTE:**

1. TO BE USED WHEN TEMPERATURE OF STACK EXCEEDS 140° F.
2. FOR INSULATION THICKNESSES GREATER THAN 6", CONTACT GAFMC CONTRACTOR SERVICES FOR ALTERNATE MEMBRANE ATTACHMENT REQUIREMENTS.
3. APPLY HEAT TO UNREINFORCED FLASHING AND FORM BY HAND PRIOR TO HOT AIR WELDING.
4. APPLY EVERGUARD® TPO AND PVC CUT EDGE SEALANT TO ALL CUT REINFORCED TPO AND PVC EDGES ( REFER TO DETAIL MA/FA/BA 115 ).



**EverGuard**  
SINGLE-PLY ROOFING SYSTEMS

ROOF PENETRATION SERIES

**HIGH TEMPERATURE STACK FLASHING**

DRAWING #	SYSTEM
508	MA/FA/BA
SCALE	ISSUE/ REVISION DATE
N.T.S.	4-01-09