



Non-Insulated TPO Mechanically Attached Systems Specification Plate

Specification



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

NON-INSULATED TPO MECHANICALLY ATTACHED SYSTEMS SPECIFICATION PLATE

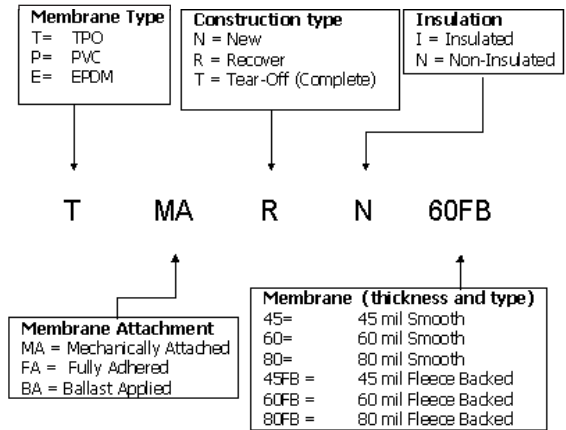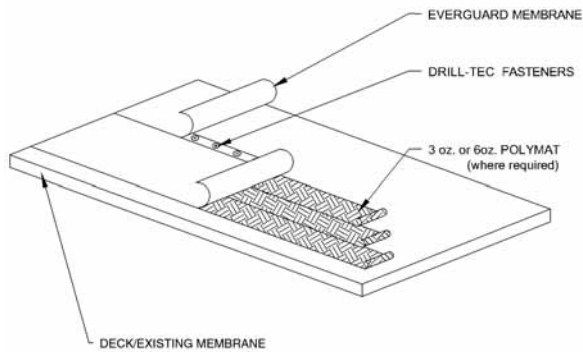

| Specification Number | Attachment Type | Construction Type | Insulation | TPO Thickness | Guarantee Length Up To (Years) |
|----------------------|-----------------------|-------------------|------------|---------------|--------------------------------|
| T-MA-N-N-45 | Mechanically Attached | New | No | .045 | 12 |
| T-MA-N-N-60 | | | | .060 | 15 |
| T-MA-N-N-80 | | | | .080 | 20 |
| T-MA-T-N-45 | Mechanically Attached | Tear Off | No | .045 | 12 |
| T-MA-T-N-60 | | | | .060 | 15 |
| T-MA-T-N-80 | | | | .080 | 20 |
| T-MA-R-N-45 | Mechanically Attached | Recover | No* | .045 | 12 |
| T-MA-R-N-60 | | | | .060 | 15 |
| T-MA-R-N-80 | | | | .080 | 20 |
| T-MA-N-N-45FB | Mechanically Attached | New | No | .045 FB | 12 |
| T-MA-N-N-60FB | | | | .060 FB | 15 |
| T-MA-N-N-80FB | | | | .080FB | 20 |
| T-MA-T-N-45FB | Mechanically Attached | Tear Off | No | .045 FB | 12 |
| T-MA-T-N-60FB | | | | .060 FB | 15 |
| T-MA-T-N-80FB | | | | .080FB | 20 |
| T-MA-R-N-45FB | Mechanically Attached | Recover | No | .045 FB | 12 |
| T-MA-R-N-60FB | | | | .060 FB | 15 |
| T-MA-R-N-80FB | | | | .080FB | 20 |

* Separator Sheet required; 3/6 oz polymat or FR 50/10
 Refer to Insulation Attachment and Membrane Attachment Tables for attachment requirements.
 Mechanically attached system require the use of half sheets.