


Freedom™
Wall Flashing
With Coated Metal Edge
FD 304

Diagram

Updated: 11/06



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

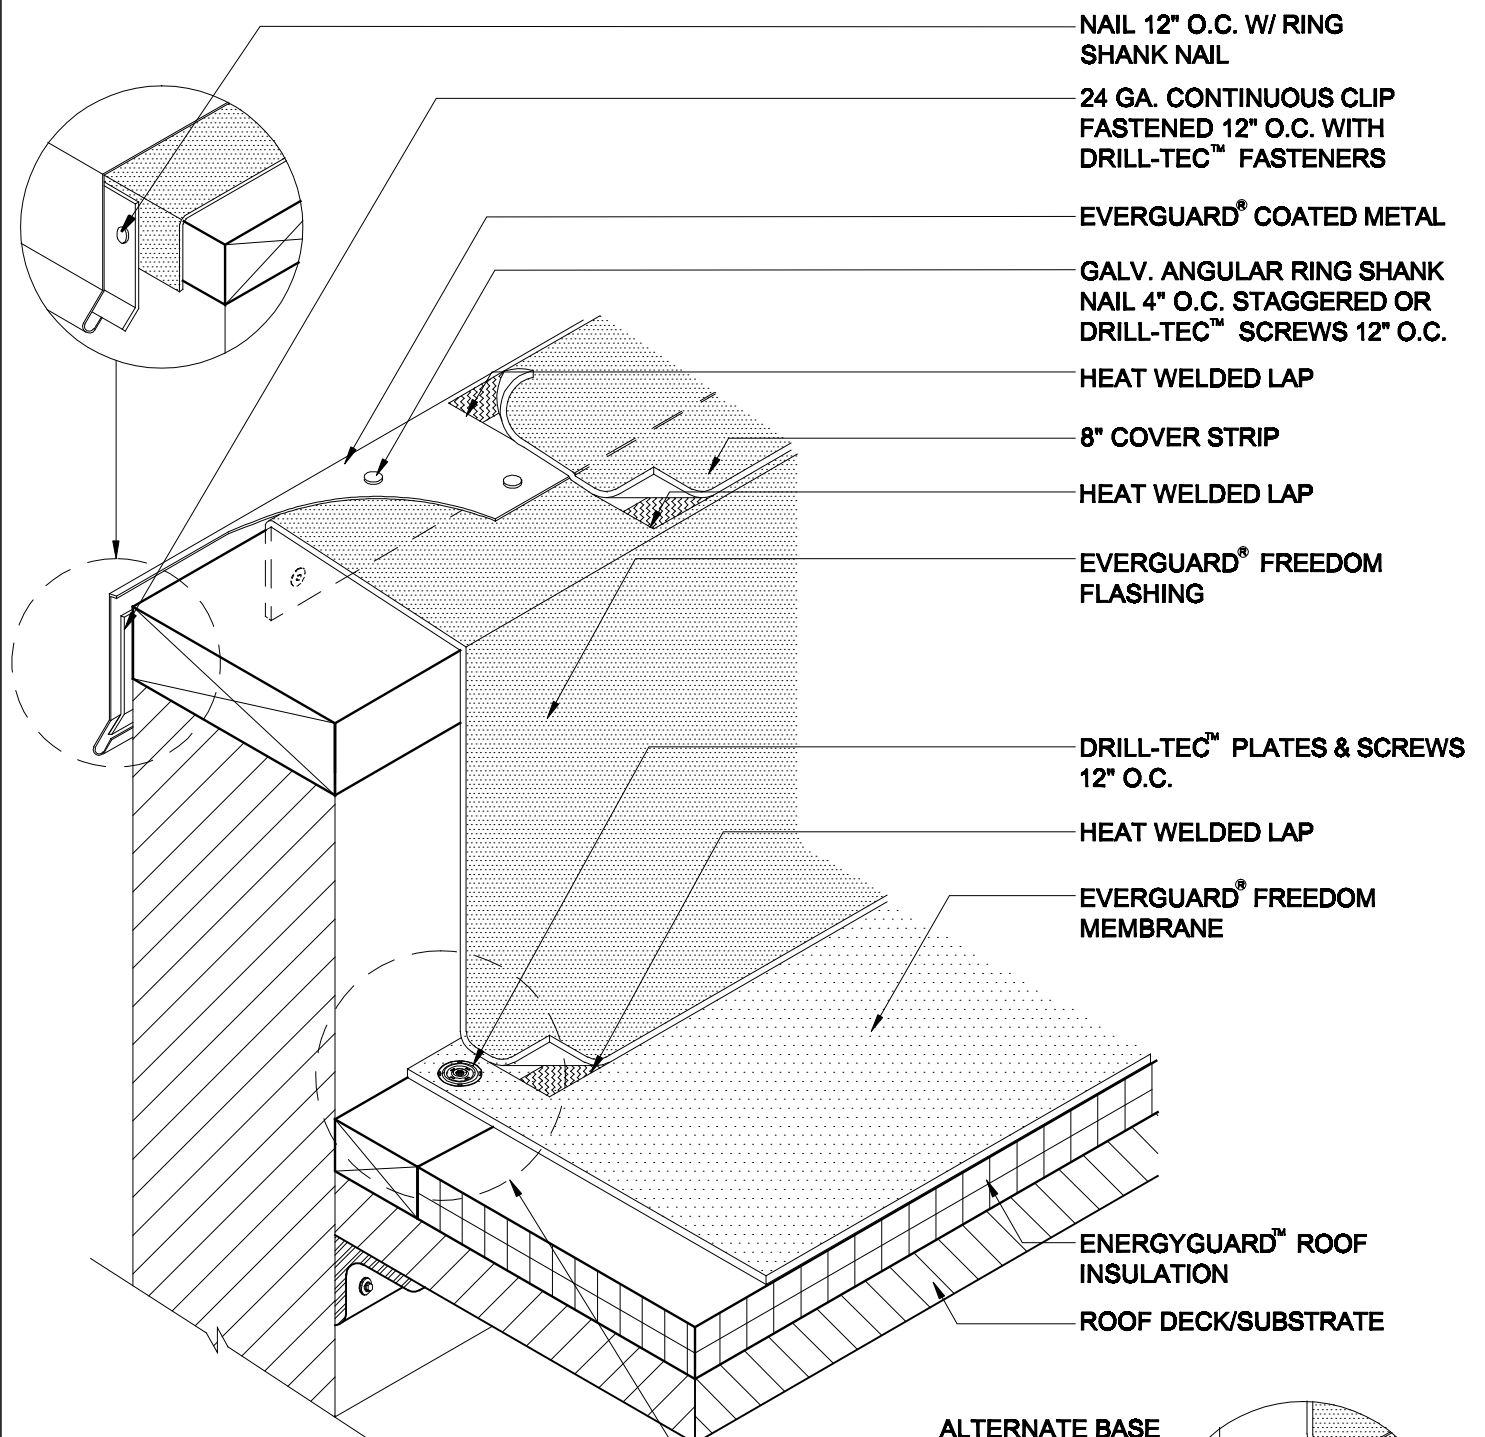


- NAIL 12" O.C. W/ RING SHANK NAIL
- 24 GA. CONTINUOUS CLIP FASTENED 12" O.C. WITH DRILL-TEC™ FASTENERS
- EVERGUARD® COATED METAL
- GALV. ANGULAR RING SHANK NAIL 4" O.C. STAGGERED OR DRILL-TEC™ SCREWS 12" O.C.
- HEAT WELDED LAP
- 8" COVER STRIP
- HEAT WELDED LAP
- EVERGUARD® FREEDOM FLASHING
- DRILL-TEC™ PLATES & SCREWS 12" O.C.
- HEAT WELDED LAP
- EVERGUARD® FREEDOM MEMBRANE
- ENERGYGUARD™ ROOF INSULATION
- ROOF DECK/SUBSTRATE

NOTE:

1. FOR INSULATION THICKNESS GREATER THAN 8", CONTACT GAFMC CONTRACTOR SERVICES FOR ALTERNATE MEMBRANE ATTACHMENT REQUIREMENTS.
2. APPLY EVERGUARD® TPO CUT EDGE SEALANT TO ALL CUT REINFORCED TPO EDGES (REFER TO DETAIL FD 115).

ALTERNATE BASE
REFER TO 307



**WALL FLASHING WITH COATED METAL
EDGE**

FREEDOM HW ONLY

DRAWING #
FD 304

SCALE	ISSUE/ REVISION DATE
N.T.S.	11-01-06