


Freedom™
Coated Metal Wall Flashing
FD 308

Diagram

Updated: 11/06




*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

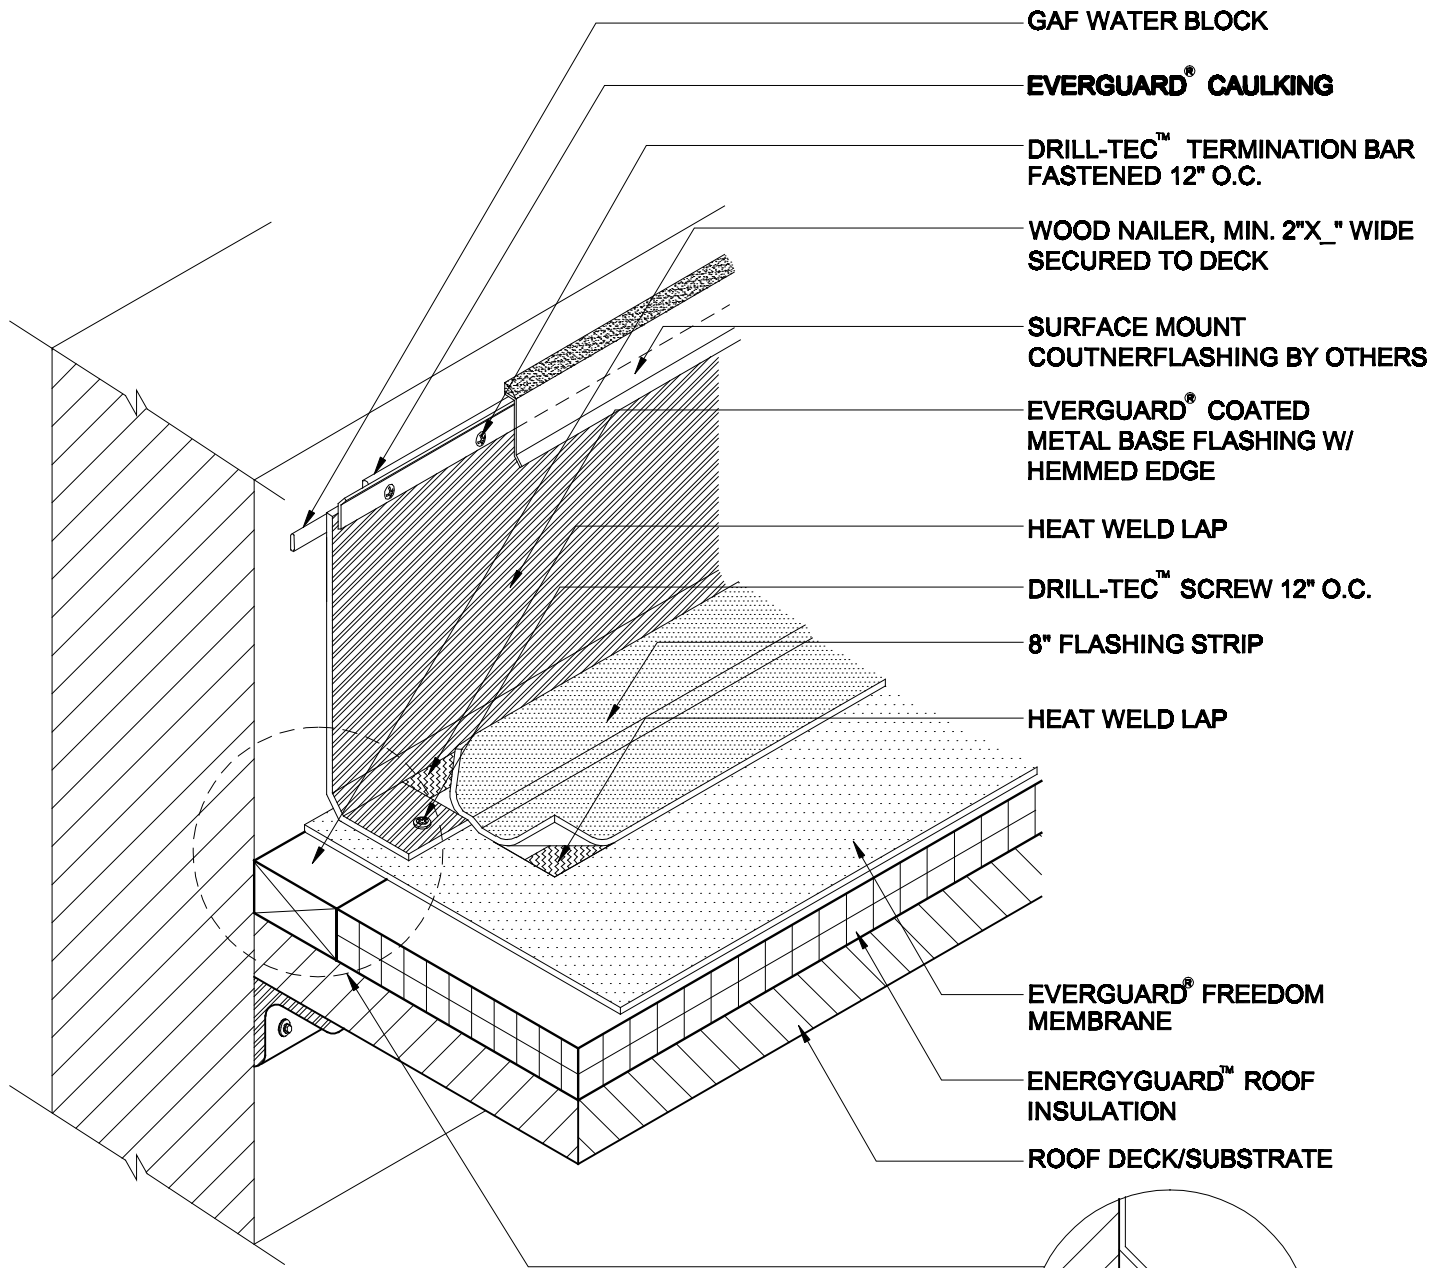

- GAF WATER BLOCK
- EVERGUARD® CAULKING
- DRILL-TEC™ TERMINATION BAR FASTENED 12" O.C.
- WOOD NAILER, MIN. 2"X_" WIDE SECURED TO DECK
- SURFACE MOUNT COUNTERFLASHING BY OTHERS
- EVERGUARD® COATED METAL BASE FLASHING W/ HEMMED EDGE
- HEAT WELD LAP
- DRILL-TEC™ SCREW 12" O.C.
- 8" FLASHING STRIP
- HEAT WELD LAP
- EVERGUARD® FREEDOM MEMBRANE
- ENERGYGUARD™ ROOF INSULATION
- ROOF DECK/SUBSTRATE

NOTE:

1. APPLY EVERGUARD® TPO CUT EDGE SEALANT TO ALL CUT REINFORCED TPO EDGES (REFER TO DETAIL FD 115).



COATED METAL WALL FLASHING

FREEDOM HW ONLY

DRAWING #
FD 308

SCALE	ISSUE/ REVISION DATE
N.T.S.	11-01-06