


Freedom™
High Temperature Stack Flashing
FD 508

Diagram



Updated: 11/06



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

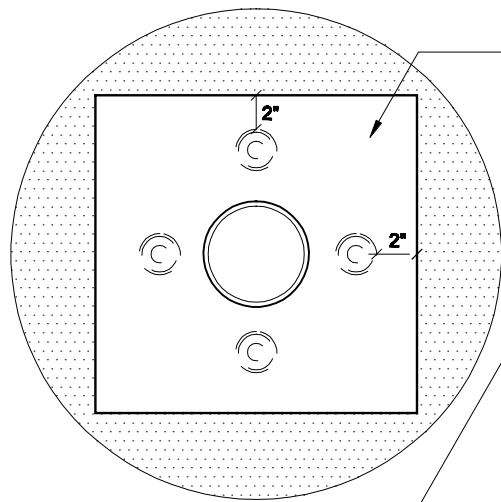

PLAN VIEW

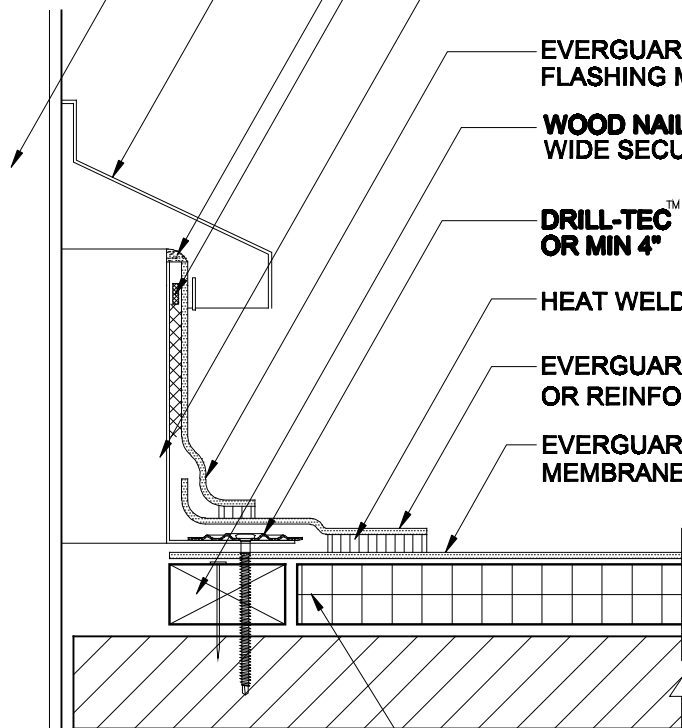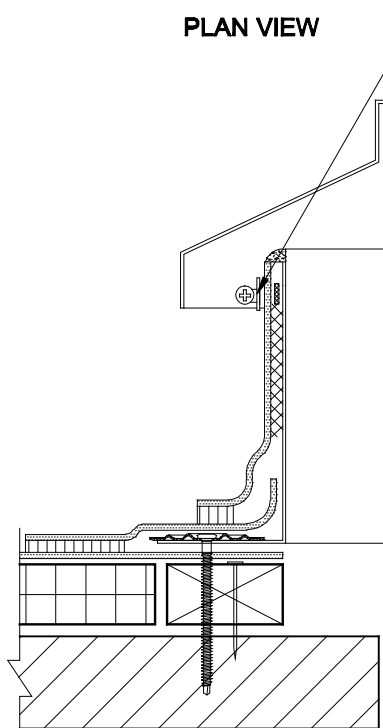

- TARGET
- STAINLESS STEEL CLAMP
- HIGH TEMPERATURE PIPE STACK
- RAIN HOOD
- EVERGUARD® BONDING ADHESIVE (OPTIONAL)
- GAF WATER BLOCK
- 24 GA. GALV. PAN
- EVERGUARD® UNREINFORCED FLASHING MEMBRANE
- WOOD NAILER, MIN. 2"x 4" WIDE SECURED TO DECK
- DRILL-TEC™ SCREWS 12" O.C. OR MIN 4"
- HEAT WELDED LAP
- EVERGUARD® UNREINFORCED OR REINFORCED MEMBRANE
- EVERGUARD® FREEDOM MEMBRANE
- ROOF DECK/SUBSTRATE
- ENERGYGUARD™ ROOF INSULATION

NOTE:

1. TO BE USED WHEN TEMPERATURE OF STACK EXCEEDS 140° F.
2. FOR INSULATION THICKNESSES GREATER THAN 6" CONTACT GAFMC CONTRACTOR SERVICES FOR ALTERNATE MEMBRANE ATTACHMENT REQUIREMENTS.
3. APPLY HEAT TO UNREINFORCED FLASHING AND FORM BY HAND PRIOR TO HOT AIR WELDING.
4. APPLY EVERGUARD® TPO CUT EDGE SEALANT TO ALL CUT REINFORCED TPO EDGES (REFER TO DETAIL FD 115).



HIGH TEMPERATURE STACK FLASHING

FREEDOM HW ONLY

DRAWING #

FD 508

SCALE

N.T.S.

ISSUE/ REVISION DATE

11-01-06