


Two (2) Ply SBS Hot Mopped System Insulated Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

TWO (2) PLY SBS HOT MOPPED SYSTEM INSULATED DECK

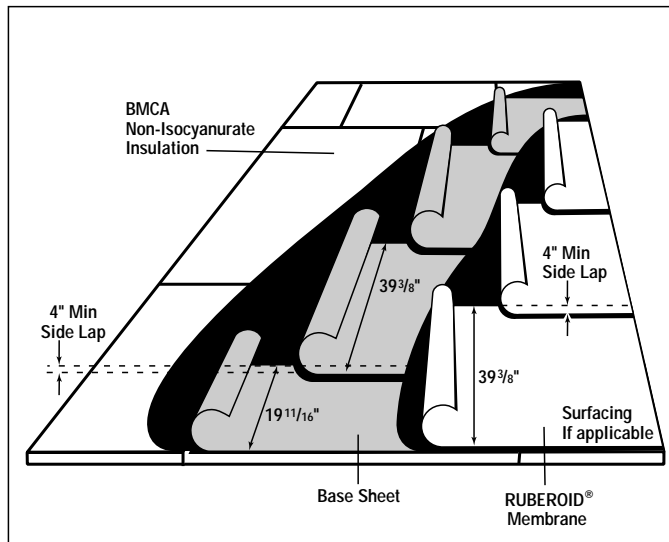

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:
Insulation (Non-Isocyanurate)
Asphalt (per ply)25 lbs. (1.22 kg/m²)
Base Sheet1 ply
Membrane1 ply
Surfacing (if applicable)

10 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET		BASE SHEET	CAP	SURFACING
<u>SPEC#</u>	<u>ATTACHMENT</u>				
I-0-2-20/30	MOP TO PERLITE OR FIB.BD		RUBEROID® 20	RUBEROID 30	
I-0-2-20/30 FR	MOP TO PERLITE OR FIB.BD		RUBEROID 20	RUBEROID 30 FR	

15 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET		BASE SHEET	CAP	
<u>SPEC#</u>	<u>ATTACHMENT</u>				
I-0-2-20/MG	MOP TO PERLITE OR FIB.BD		RUBEROID 20	MOP GRANULE	
I-0-2-20/MGFR	MOP TO PERLITE OR FIB.BD		RUBEROID 20	MOP 170 FR	
I-0-2-20/MGPFR	MOP TO PERLITE OR FIB.BD		RUBEROID 20	MOP FR	
I-0-2-20/MSG	MOP TO PERLITE OR FIB.BD		RUBEROID 20	MOP SMOOTH	GRAVEL

20 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET		BASE SHEET	CAP
<u>SPEC#</u>	<u>ATTACHMENT</u>			
I-0-2-MGP	MOP TO PERLITE OR FIB.BD		MOP SMOOTH	MOP GRANULE PLUS
I-0-2-MGPFR	MOP TO PERLITE OR FIB.BD		MOP SMOOTH	MOP FR

Hot Mopped
Systems