


Three (3) Ply SBS Hot Mopped System Insulated Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

THREE (3) PLY SBS HOT MOPPED SYSTEM INSULATED DECK

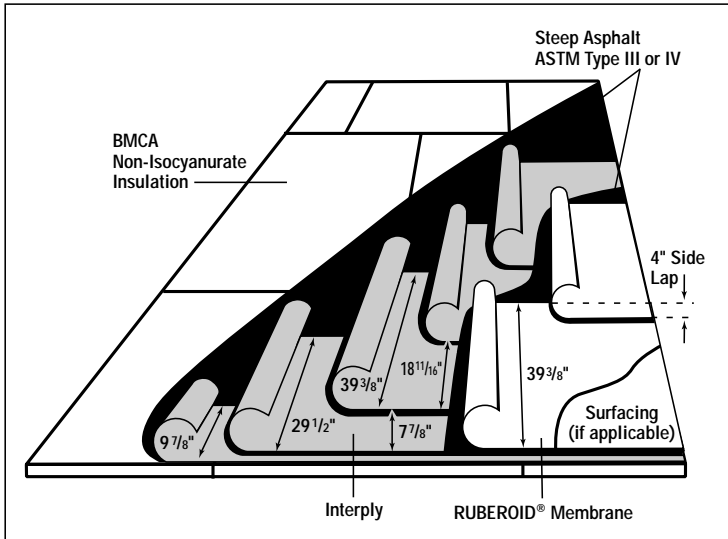

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:
Insulation (Non-Isocyanurate)
Asphalt (per ply)25 lbs. (1.22 kg/m²)
Base Sheet1 ply
Interply2 plies
Membrane1 ply
Surfacing (if applicable)

15 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET				
<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>INTERPLY</u>	<u>INTERPLY</u>	<u>CAP</u>	<u>SURFACING</u>
I-2-1-MG	MOP TO PERLITE OR FIB.BD	PLY 4	PLY 4	MOP GRANULE	
	MOP TO PERLITE OR FIB.BD	FLEXPLY™ 6	FLEXPLY 6	MOP GRANULE	
I-2-1-MGFR	MOP TO PERLITE OR FIB.BD	PLY 4	PLY 4	MOP 170 FR	
	MOP TO PERLITE OR FIB.BD	FLEXPLY 6	FLEXPLY 6	MOP 170 FR	
I-2-1-MSG	MOP TO PERLITE OR FIB.BD	PLY 4	PLY 4	MOP SMOOTH	GRAVEL
	MOP TO PERLITE OR FIB.BD	FLEXPLY 6	FLEXPLY 6	MOP SMOOTH	GRAVEL

20 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET				
<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>INTERPLY</u>	<u>INTERPLY</u>	<u>CAP</u>	
I-2-1-MGP	MOP TO PERLITE OR FIB.BD	FLEXPLY 6	FLEXPLY 6	MOP GRANULE PLUS	
I-2-1-MGPFR	MOP TO PERLITE OR FIB.BD	FLEXPLY 6	FLEXPLY 6	MOP PLUS FR	

Hot Mopped Systems