


# Four (4) Ply SBS Hot Mopped System Insulated Deck

Diagram




*Quality You Can Trust Since 1886...  
From North America's Largest Roofing Manufacturer™*

# FOUR (4) PLY SBS HOT MOPPED SYSTEM INSULATED DECK

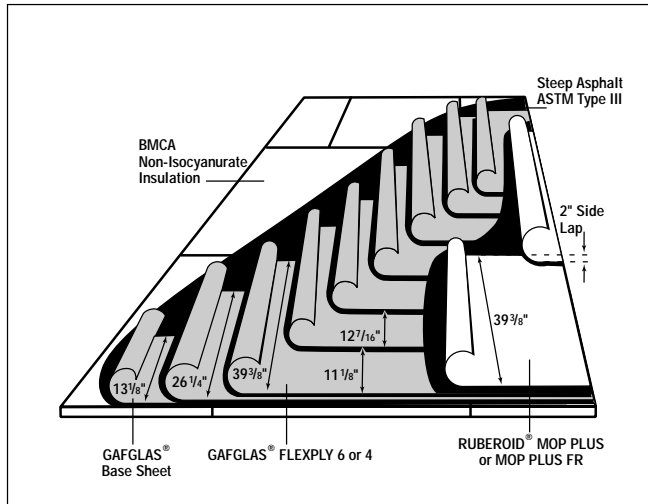

OR

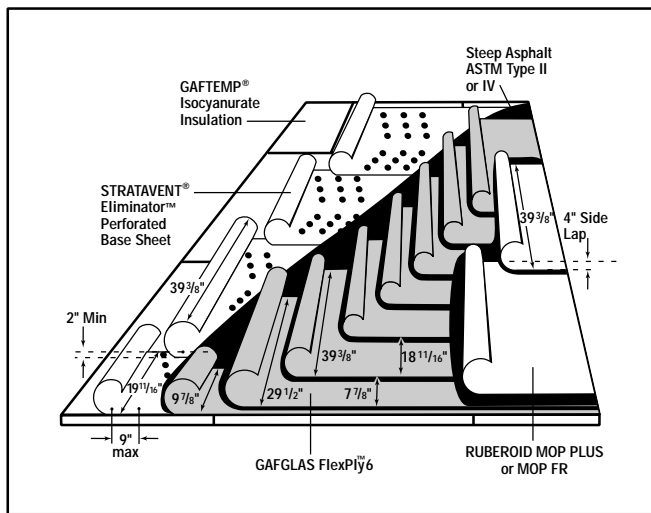

OR

## GENERAL

Safety: Refer to Section 1.06.  
DO NOT BEGIN INSTALLATION  
UNTIL THIS INFORMATION IS READ,  
UNDERSTOOD AND IMPLEMENTED.

## MATERIALS

Material Requirements per 100 sq. ft.:  
Insulation  
Asphalt (per ply) . . . . .25 lbs. (1.22 kg/m<sup>2</sup>)  
Interply . . . . .3 plies  
Membrane . . . . .1 ply

Base Sheet . . . . .1 ply  
Interply . . . . .2 plies  
Membrane . . . . .1 ply

## 20 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

SPEC#	ATTACHMENT	BASE SHEET	INTERPLY	INTERPLY	INTERPLY	CAP
I-3-1-MGP	SVPerf TO ISO	STRATAVENT® PERFORATED	FLEXPPLY™ 6	FLEXPPLY 6		MOP GRANULE PLUS
	SVPerf TO ISO	STRATAVENT PERFORATED	PLY 4	PLY 4		MOP GRANULE PLUS
	MOP TO PERLITE OR FIB.BD		FLEXPPLY 6	FLEXPPLY 6	FLEXPPLY 6	MOP GRANULE PLUS
	MOP TO PERLITE OR FIB.BD		PLY 4	PLY 4	PLY 4	MOP GRANULE PLUS
I-3-1-MGPFRR	SVPerf TO ISO	STRATAVENT PERFORATED	FLEXPPLY 6	FLEXPPLY 6		MOP FR
	SVPerf TO ISO	STRATAVENT PERFORATED	PLY 4	PLY 4		MOP FR
	MOP TO PERLITE OR FIB.BD		FLEXPPLY 6	FLEXPPLY 6	FLEXPPLY 6	MOP FR
	MOP TO PERLITE OR FIB.BD		PLY 4	PLY 4	PLY 4	MOP FR

Hot Mopped Systems