


Three (3) Ply SBS Hot Mopped System Non-Nailable Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

THREE (3) PLY SBS HOT MOPPED SYSTEM NON-NAILABLE DECK

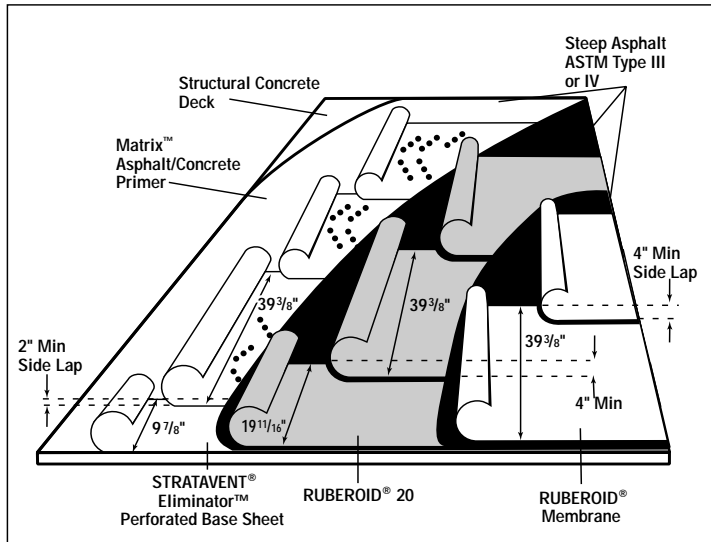

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:

Asphalt25 lbs. (1.22 kg/m ²)
Base Sheet1 ply
Membrane1 ply
Surfacing (if applicable)		

10 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET			
<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>BASE SHEET</u>	<u>INTERPLY</u>	<u>CAP</u>
NN-1-2-20/30	SVPerf TO CONCRETE	STRATAVENT® PERFORATED	RUBEROID® 20	RUBEROID 30
NN-1-2-20/30FR	SVPerf TO CONCRETE	STRATAVENT PERFORATED	RUBEROID 20	RUBEROID 30 FR

Hot Mopped
Systems