


Two (2) Ply SBS Hot Mopped System Nailable Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

TWO (2) PLY SBS HOT MOPPED SYSTEM NAILABLE DECK

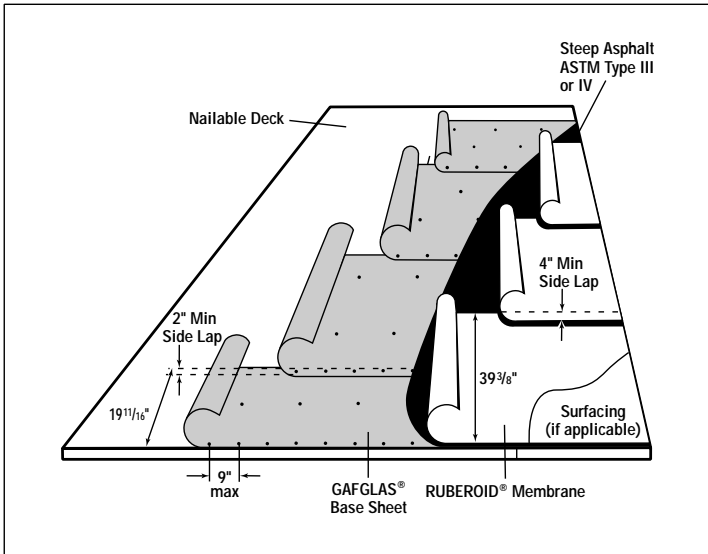

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:

- Insulation
- Asphalt (per ply)25 lbs. (1.22 kg/m²)
- Base Sheet1 ply
- Membrane1 ply
- Surfacing (if applicable)

12 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

SPEC#	ATTACHMENT	BASE SHEET	CAP	SURFACING
N-1-1-MG	NAIL	#75 BASE SHEET	MOP GRANULE	
	NAIL	#80 ULTIMA™ BASE SHEET	MOP GRANULE	
	NAIL	MODIFIED BASE SHEET	MOP GRANULE	
	NAIL	STRATAVENT® NAILABLE	MOP GRANULE	
N-1-1-MGFR	NAIL	#75 BASE SHEET	MOP 170 FR	
	NAIL	#80 ULTIMA BASE SHEET	MOP 170 FR	
	NAIL	MODIFIED BASE SHEET	MOP 170 FR	
	NAIL	STRATAVENT NAILABLE	MOP 170 FR	
N-1-1-MSG	NAIL	#75 BASE SHEET	MOP SMOOTH	GRAVEL
	NAIL	#80 ULTIMA BASE SHEET	MOP SMOOTH	GRAVEL
	NAIL	MODIFIED BASE SHEET	MOP SMOOTH	GRAVEL
	NAIL	STRATAVENT NAILABLE	MOP SMOOTH	GRAVEL

Hot Mopped Systems