


# Two (2) Ply SBS Hot Mopped System Lightweight Insulating Concrete

Diagram



*Quality You Can Trust Since 1886...  
From North America's Largest Roofing Manufacturer™*

# TWO (2) PLY SBS HOT MOPPED SYSTEM LIGHTWEIGHT INSULATING CONCRETE

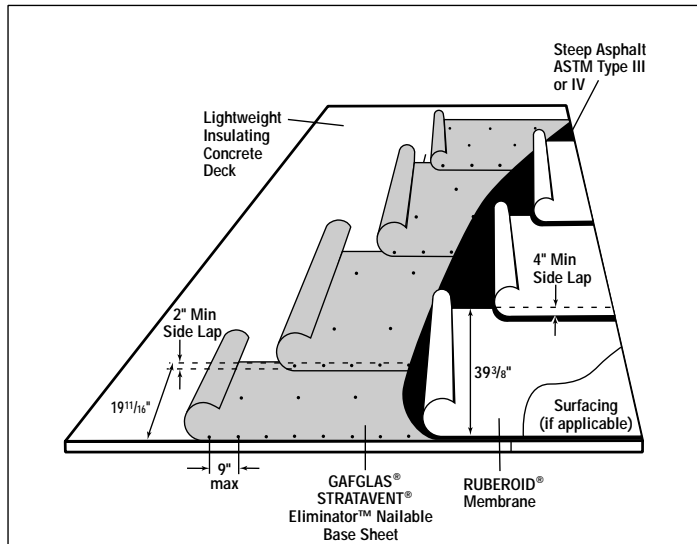

## GENERAL

Safety: Refer to Section 1.06.  
DO NOT BEGIN INSTALLATION  
UNTIL THIS INFORMATION IS READ,  
UNDERSTOOD AND IMPLEMENTED.

## MATERIALS

Material Requirements per 100 sq. ft.:  
Asphalt (per ply) . . . . .25 lbs. (1.22 kg/m<sup>2</sup>)  
Base Sheet . . . . .1 ply  
Membrane . . . . .1 ply  
Surfacing (if applicable)

## 12 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET			
<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>BASE SHEET</u>	<u>CAP</u>	<u>SURFACING</u>
N-1-1-MG	FASTENER	STRATAVENT® NAILABLE	MOP GRANULE	
N-1-1-MGFR	FASTENER	STRATAVENT NAILABLE	MOP 170 FR	
N-1-1-MSG	FASTENER	STRATAVENT NAILABLE	MOP SMOOTH	GRAVEL

Hot Mopped  
Systems