


Two (2) Ply SBS Hot Mopped System Existing Smooth Surface BUR Roof

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

TWO (2) PLY SBS HOT MOPPED SYSTEM EXISTING SMOOTH SURFACE BUR ROOF

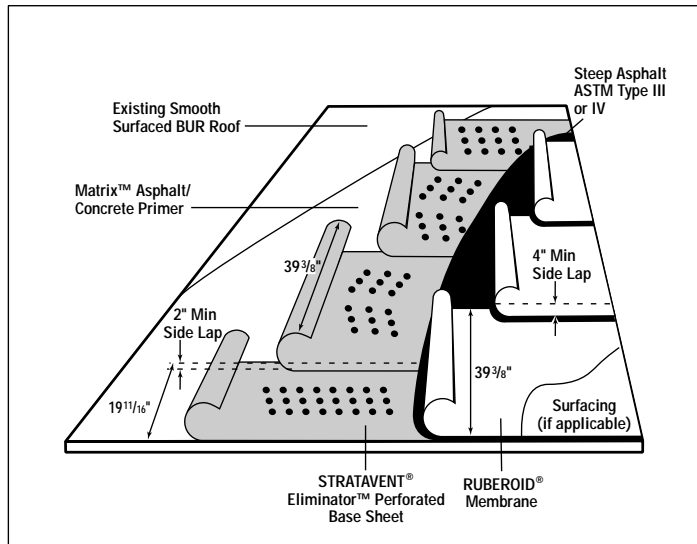

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:
Asphalt (per ply)25 lbs. (1.22 kg/m²)
Base Sheet1 ply
Membrane1 ply
Surfacing (if applicable)
Primer

10 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET			
<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>BASE SHEET</u>	<u>CAP</u>	<u>SURFACING</u>
R-1-1-MG	SVPerf TO OLD ROOF	STRATAVENT® PERFORATED	MOP GRANULE	
R-1-1-MGFR	SVPerf TO OLD ROOF	STRATAVENT PERFORATED	MOP 170 FR	
R-1-1-MSG	SVPerf TO OLD ROOF	STRATAVENT PERFORATED	MOP SMOOTH	GRAVEL

Hot Mopped
Systems