


Four (4) Ply SBS Heat Weld™ System Insulated Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

FOUR (4) PLY SBS HEAT-WELD™ SYSTEM INSULATED DECK

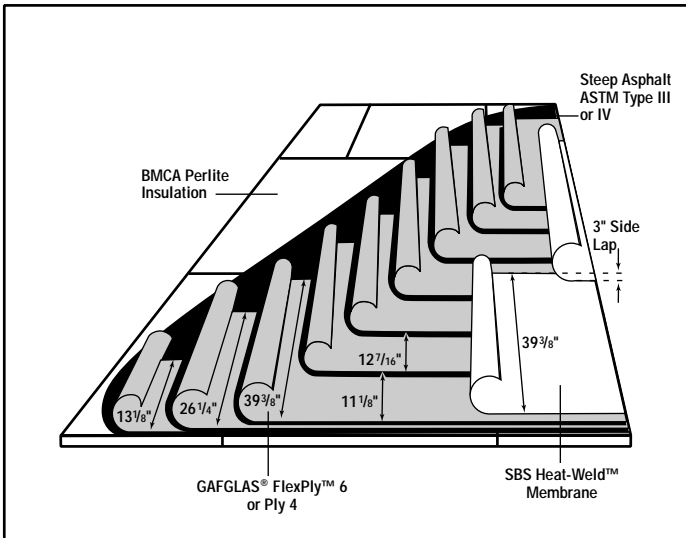

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION UNTIL THIS INFORMATION IS READ, UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:

- Insulation (Perlite)
- Asphalt (per ply)25 lb. (1.22 kg/m²)
- Interply3 plies
- Membrane1 ply

20 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET				
SPEC#	ATTACHMENT	INTERPLY	INTERPLY	INTERPLY	CAP
I-3-1-HGP	MOP TO PERLITE	PLY 4	PLY 4	PLY 4	SBS HEAT-WELD™ PLUS
	MOP TO PERLITE	FLEXPLY™ 6	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS
I-3-1-HGPFR	MOP TO PERLITE	PLY 4	PLY 4	PLY 4	SBS HEAT-WELD PLUS FR
	MOP TO PERLITE	FLEXPLY 6	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS FR

NOTE: If GAFGLAS® STRATAVENT® ELIMINATOR™ Perforated Venting Base Sheet is installed under this specification, one interply may be eliminated and the system can be installed directly over GAFTEMP® Isocyanurate roof insulation.