


Two (2) Ply SBS Heat Weld™ System Insulated Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

TWO (2) PLY SBS HEAT-WELD™ SYSTEM NON-NAILABLE DECK

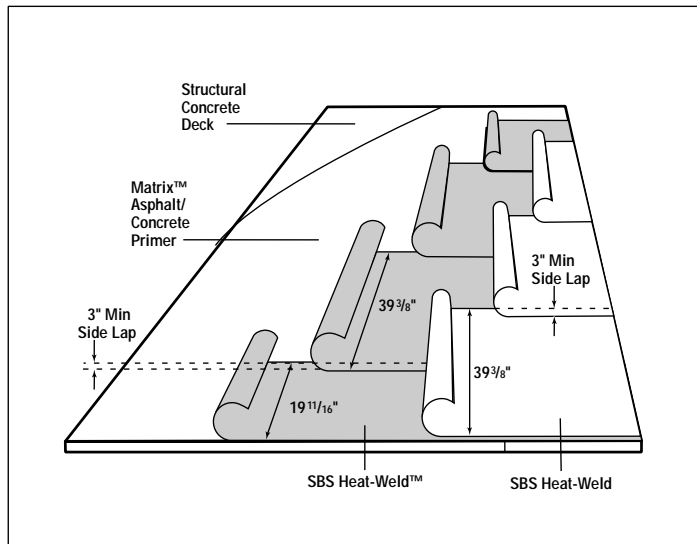

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:

Base Sheet1 ply
Interply1 ply
Membrane1 ply

12 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

<u>SPEC #</u>	<u>BOTTOM SHEET</u> <u>ATTACHMENT</u>	<u>BASE SHEET</u>	<u>CAP</u>
NN-0-2-25/HG	TORCH	SBS HEAT-WELD™ 25	SBS HEAT-WELD GRANULE
NN-0-2-25/HGFR	TORCH	SBS HEAT-WELD 25	SBS HEAT-WELD 170 FR
NN-0-2-HG	TORCH	SBS HEAT-WELD SMOOTH	SBS HEAT-WELD GRANULE
NN-0-2-HGFR	TORCH	SBS HEAT-WELD SMOOTH	SBS HEAT-WELD 170 FR