


Four (4) Ply SBS Heat Weld™ System Nailable Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

FOUR (4) PLY SBS HEAT-WELD™ SYSTEM NAILABLE DECK

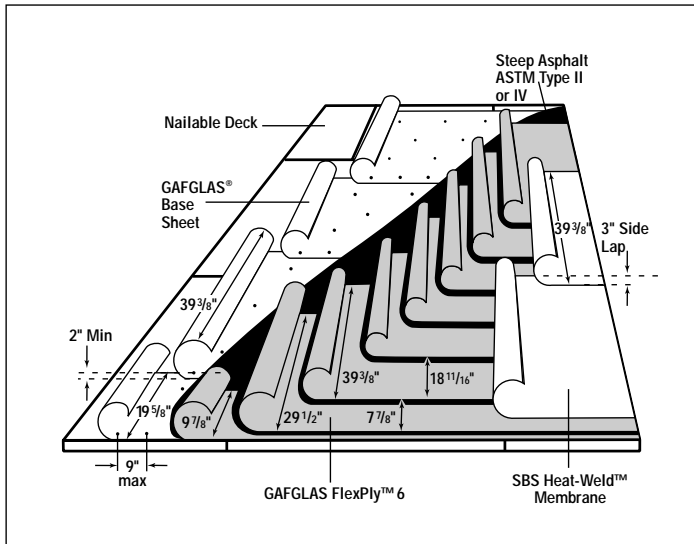

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:
Asphalt (per ply)25 lb. (1.22 kg/m²)
Base Sheet1 ply
Interply2 plies
Membrane1 ply

20 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES (WEST ZONE ONLY)

SPEC#	BOTTOM SHEET				
	ATTACHMENT	BASE SHEET	INTERPLY	INTERPLY	CAP
N-3-1-HGP	NAIL	#75 BASE SHEET	FLEXPLY™ 6	FLEXPLY 6	SBS HEAT-WELD™ PLUS
	NAIL	#80 ULTIMA™ BASE SHEET	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS
	NAIL	MODIFIED BASE SHEET	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS
	NAIL	STRATAVENT® NAILABLE	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS
N-3-1-HGPF	NAIL	#75 BASE SHEET	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS FR
	NAIL	#80 ULTIMA BASE SHEET	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS FR
	NAIL	MODIFIED BASE SHEET	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS FR
	NAIL	STRATAVENT NAILABLE	FLEXPLY 6	FLEXPLY 6	SBS HEAT-WELD PLUS FR