


Four (4) Ply SBS Heat Weld™ System Lightweight Insulating Concrete

Digram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

FOUR (4) PLY SBS HEAT-WELD™ SYSTEM LIGHTWEIGHT INSULATING CONCRETE

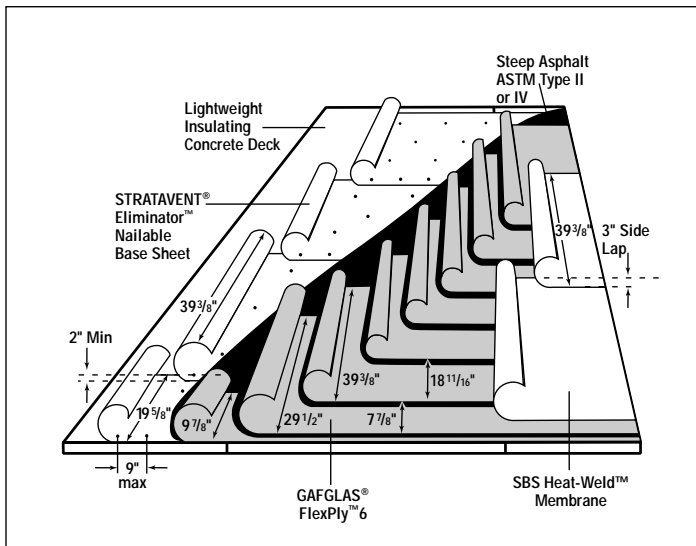

GENERAL

Safety: Refer to Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:
Asphalt (per ply)25 lbs. (1.22 kg/m²)
Base Sheet1 ply
Interply2 plies
Membrane1 ply

20 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

	BOTTOM SHEET				
<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>BASE SHEET</u>	<u>INTERPLY</u>	<u>INTERPLY</u>	<u>CAP</u>
N-3-1-HGP	FASTENER	STRATAVENT® NAILABLE	FLEXPPLY™ 6	FLEXPPLY 6	SBS HEAT-WELD PLUS
N-3-1-HGPFRR	FASTENER	STRATAVENT NAILABLE	FLEXPPLY 6	FLEXPPLY 6	SBS HEAT-WELD PLUS FR