


Four (4) Ply APP Torch System Insulated Deck

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

FOUR (4) PLY APP TORCH SYSTEM INSULATED DECK

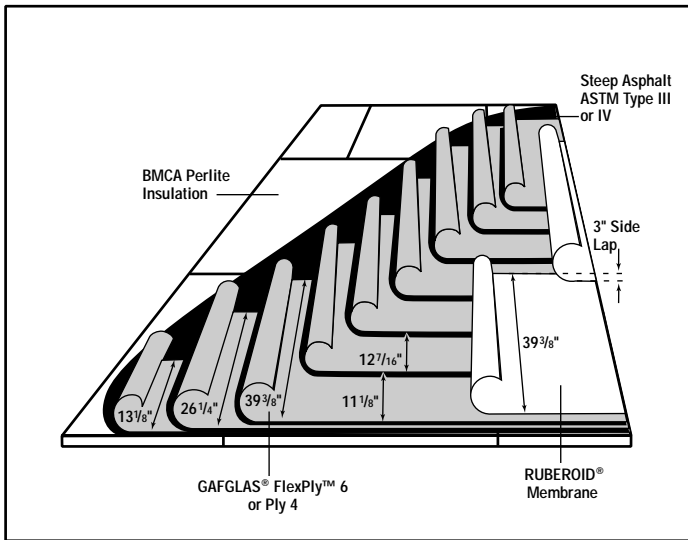

GENERAL

Safety: Refer to Section 1.06.
**DO NOT BEGIN INSTALLATION
 UNTIL THIS INFORMATION IS READ,
 UNDERSTOOD AND IMPLEMENTED.**

MATERIALS

Material Requirements per 100 sq. ft.:
 Asphalt (per ply)25 lbs. (1.22 kg/m²)
 Interply3 plies
 Membrane1 ply
 Insulation (Perlite)

20 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

SPEC#	ATTACHMENT	INTERPLY	INTERPLY	INTERPLY	CAP
I-3-1-TGP	MOP TO PERLITE	FLEXPLY™ 6	FLEXPLY 6	FLEXPLY 6	TORCH GRANULE PLUS
	MOP TO PERLITE	PLY 4	PLY 4	PLY 4	TORCH GRANULE PLUS
I-3-1-TGPFR	MOP TO PERLITE	FLEXPLY 6	FLEXPLY 6	FLEXPLY 6	TORCH FR
	MOP TO PERLITE	PLY 4	PLY 4	PLY 4	TORCH FR

Note: If GAFGLAS® STRATAVENT® ELIMINATOR™ Perforated Venting Base Sheet is installed under this specification, one interply may be eliminated and the system can be installed directly over GAFTEMP® Isocyanurate roof insulation.