

Vent Stack Flashing Detail MB/BUR 15

Diagram




*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

MB 15/BUR 15 – VENT STACK FLASHING DETAIL



Flashing Details

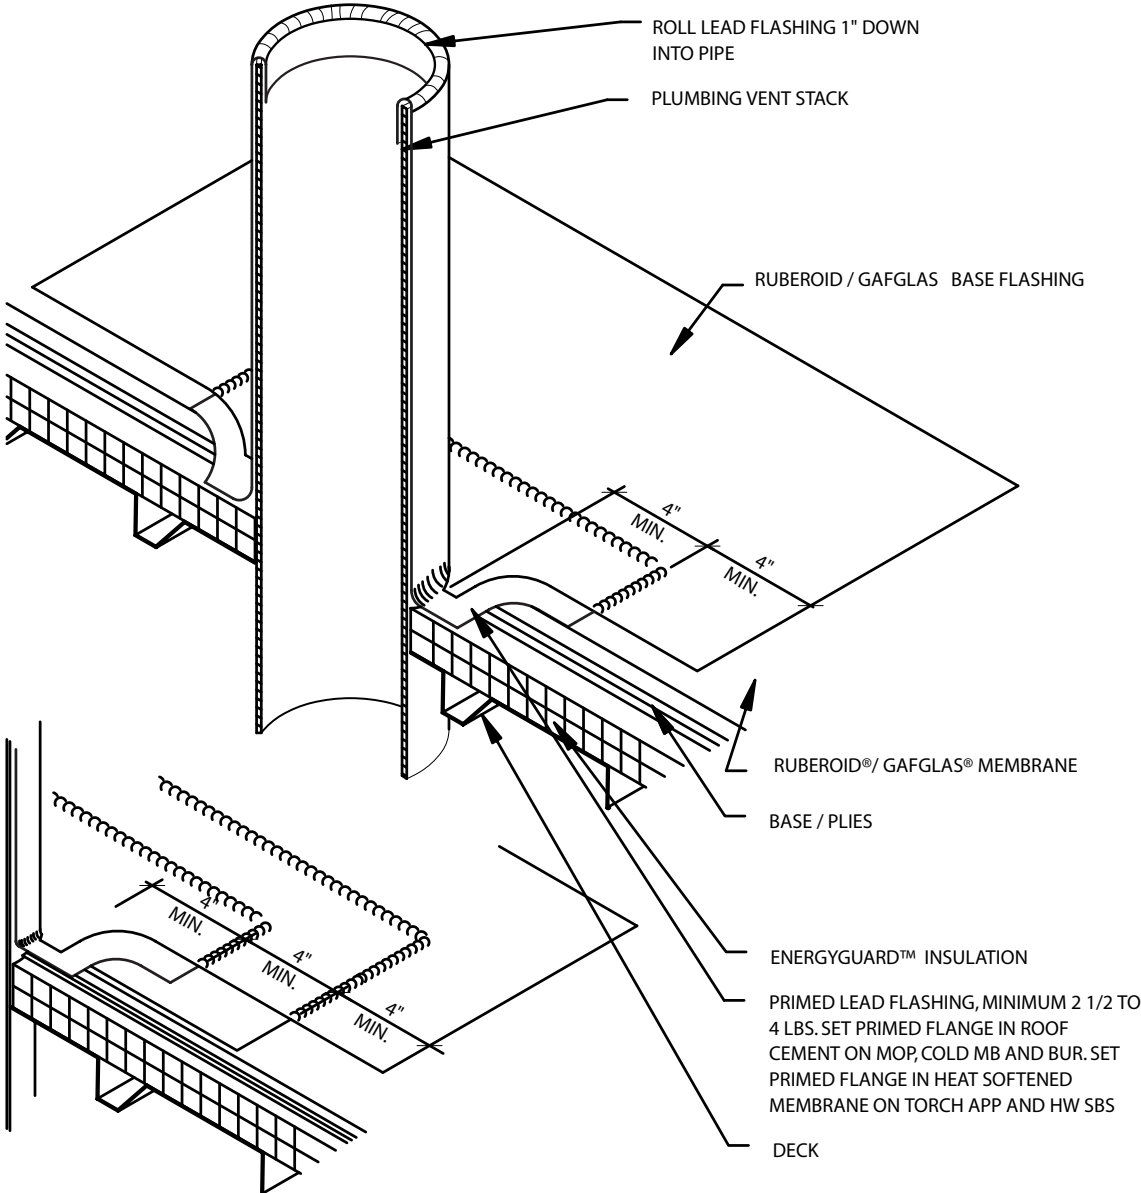

PREFERRED ALTERNATE

NOTE:

1. SHEET LEAD MINIMUM OF 2-1/2 POUNDS PER SQUARE FOOT.
2. MINIMUM 18" CLEARANCE FROM PIPES, WALLS AND CURBS.
3. FOR TORCH APPLIED RUBEROID, TORCH THE AREA OF RUBEROID MB MEMBRANE OVER WHICH THE METAL IS TO BE PLACED AND SET THE METAL INTO THE MB WHILE THE MB IS STILL MOLTEN.