

Four (4) Ply Built Up Roofing System Lightweight Insulating Concrete

Diagram




*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

FOUR (4) PLY BUILT UP ROOFING SYSTEM LIGHTWEIGHT INSULATING CONCRETE



Built-Up Roofing Systems

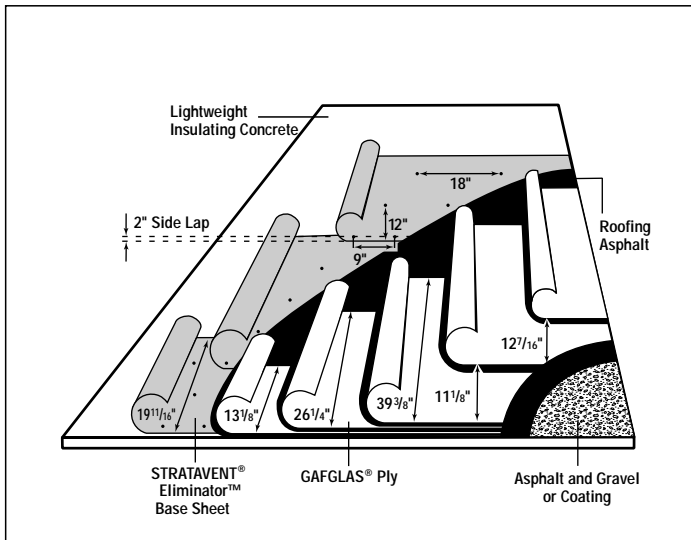

GENERAL

Safety: Refer to Section Section 1.06.
DO NOT BEGIN INSTALLATION
UNTIL THIS INFORMATION IS READ,
UNDERSTOOD AND IMPLEMENTED.

MATERIALS

Material Requirements per 100 sq. ft.:
Asphalt (per ply)25 lbs. (1.22 kg/m²)
Base Sheet1 ply
Ply Sheets3 plies
Surfacing

12 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

BOTTOM SHEET

<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>BASE SHEET</u>	<u>INTERPLY</u>	<u>INTERPLY</u>	<u>INTERPLY</u>	<u>SURFACING</u>
N-B-4-G	FASTENER	STRATAVENT® NAILABLE	PLY 4	PLY 4	PLY 4	GRAVEL
N-B-4-C	FASTENER	STRATAVENT NAILABLE	PLY 4	PLY 4	PLY 4	COATING

15 YEAR DIAMOND PLEDGE AND SYSTEM PLEDGE GUARANTEES

BOTTOM SHEET

<u>SPEC#</u>	<u>ATTACHMENT</u>	<u>BASE SHEET</u>	<u>INTERPLY</u>	<u>INTERPLY</u>	<u>INTERPLY</u>	<u>SURFACING</u>
N-B-4-G/P6	FASTENER	STRATAVENT NAILABLE	FLEXPPLY™ 6	FLEXPPLY 6	FLEXPPLY 6	GRAVEL
N-B-4-C/P6	FASTENER	STRATAVENT NAILABLE	FLEXPPLY 6	FLEXPPLY 6	FLEXPPLY 6	COATING