

Roof Drain Detail MB/BUR 8

Diagram




*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

MB 8/BUR 8 – ROOF DRAIN DETAIL



Flashing Details

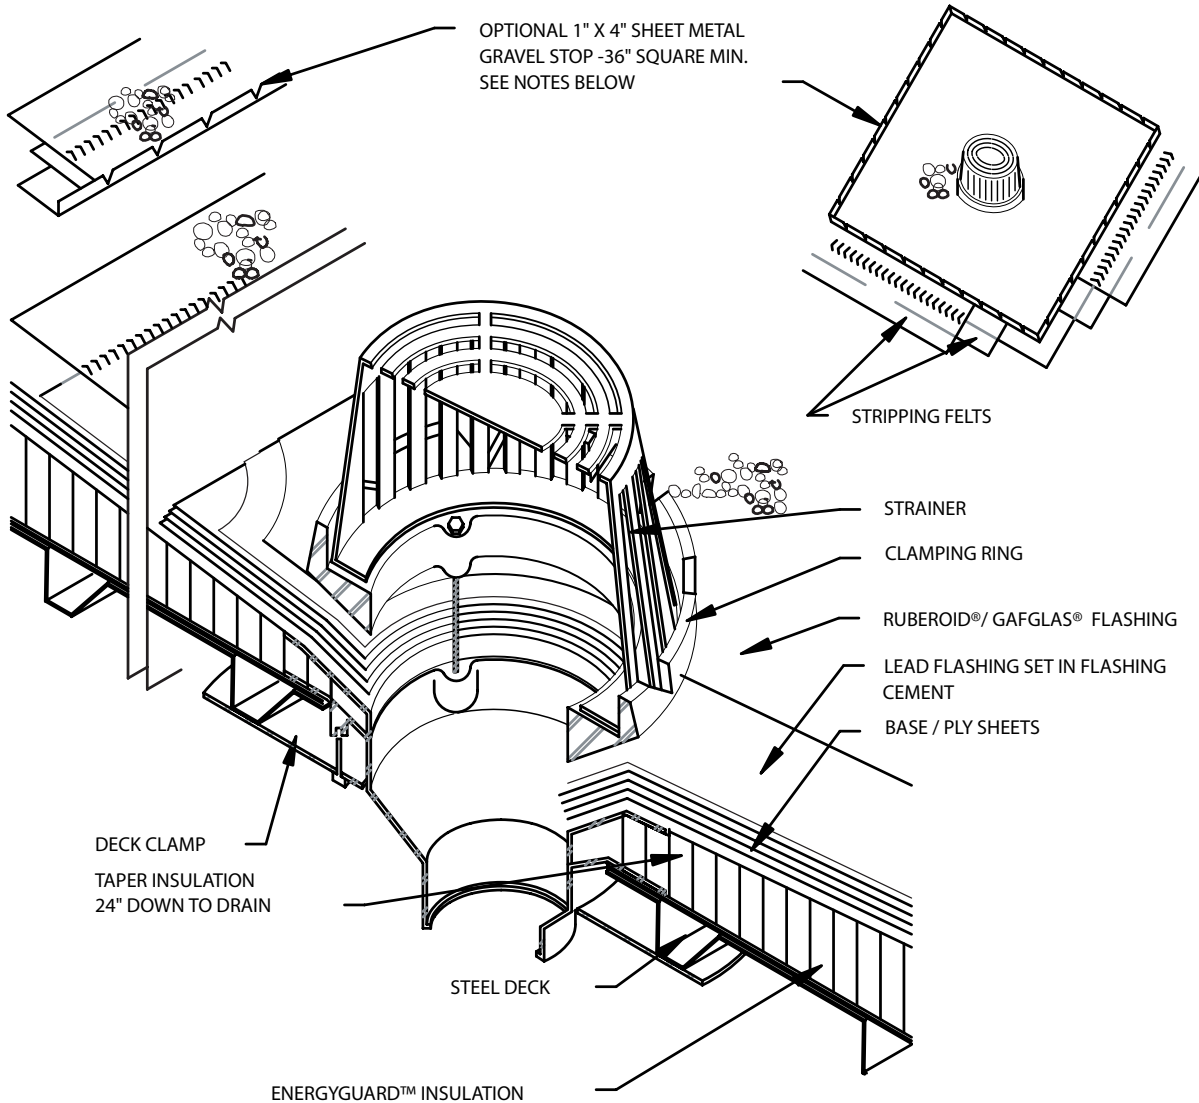

NOTES:

1. MINIMUM 30" SQUARE, 2-1/2-LB. TO 4-LB. LEAD OR 16 OZ. SOFT COPPER FLASHING. PRIME TOP SURFACE BEFORE STRIPPING.
2. MEMBRANE PLYS, METAL FLASHING AND FLASHING PLYS EXTEND UNDER CLAMPING RING.
3. STRIPPING FELTS-EXTEND 4" AND 8" BEYOND EDGE OF FLASHING SHEET, BUT NOT BEYOND EDGE OF SUMP.

Minimum 30 inch square, 2 1/2 pound to 4 pound lead flashing. Set primed flange in roof cement on Mop MB or Cold MB. Set primed flange in heat softened membrane on Torch APP and HW SBS systems. Prime top surface before stripping. Membrane plies, metal flashing, and flash-in plies extend under clamping ring. Stripping membrane extends 4 inches beyond the edge of flashing sheet, but not beyond edge of sump.