


StrataVent® Eliminator™ Perforated Venting Detail, New Roofing - Non-Nailable Deck MB/BUR 35

Diagram



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*

MB 35/BUR 35 – STRATAVENT® ELIMINATOR™ PERFORATED VENTING DETAIL, NEW ROOFING – NON-NAILABLE DECK

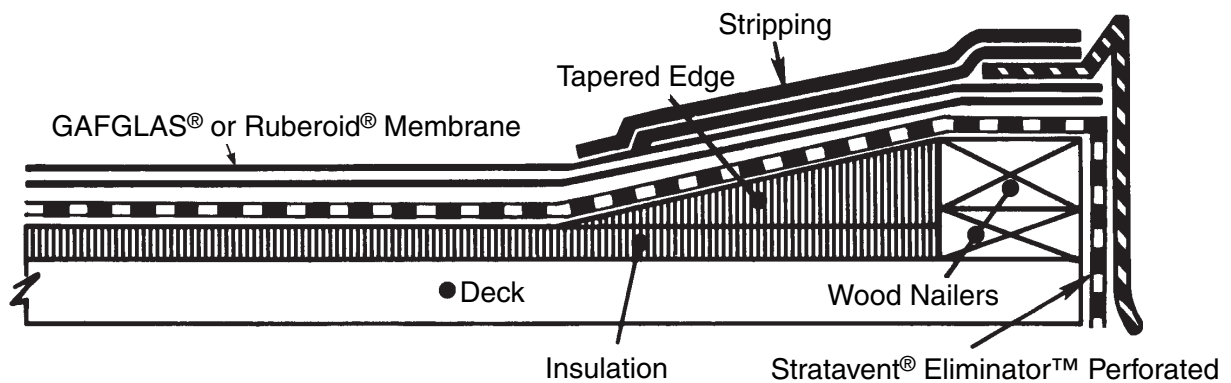

Flashing Details

For use over insulation, poured concrete and other properly prepared acceptable non-nailable roof decks.

Refer to MB/BUR Systems Installation Requirement Section.

Note: DO NOT apply Ruberoid® TORCH or Ruberoid® HEAT-WELD™ membranes directly to STRATAVENT® Eliminator™ Perforated Venting Base Sheet. At least one ply of GAFGLAS® #75 Base Sheet or two plies of GAFGLAS® Ply Sheets MUST be hot mopped over the STRATAVENT® Eliminator™ Perforated Venting Base Sheet before Torch applying Ruberoid® membranes.

When the minimum dimension of the roof exceeds 60 feet, top side field venting should be used in addition of the edge and parapet wall venting. Roof vents are to be applied at the rate of one vent per 1,000 square feet of roof area.